

Gas Range Static Oven 600mm

CR6D, CR6C



- 600mm wide
- Stainless steel finish
- 5.5kW (18,800Btu/hr) burners
- 2 or 4 open burner configuration
- Cast iron burners and vitreous enamel pot stands
- High crown static oven
- Manual pilot ignition
- Side hinged door
- Welded vitreous enameled oven liner
- Griddle option - 300mm machine finished 12mm thickness, with piezo ignition
- Adjustable front feet and rear rollers
- Fully modular
- Flame failure protection all open burners

OVERALL CONSTRUCTION

Cooktop

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- 12mm machined surface mild steel griddle plates
- Stainless steel front, sides and splashback
- Aluminised steel spill tray
- Griddle sections are standard on RH side only

Oven

- Aluminised oven frame
- Fully welded and vitreous enamelled oven liner
- GN 1/1 capacity with 4 position racking
- Supplied with two chrome plated oven racks
- Vitreous enamelled oven spill tray
- Vitreous enamelled door inners
- Stainless steel exterior door and sides
- 50mm dia. stainless steel adjustable legs to front and two rollers at rear

CONTROLS

Cooktop

- Large easy use control knobs
- Variable high to low controls to open and griddle burners
- Flame failure on open burners
- Griddles standard with pilot, flame failure and piezo ignition


Oven

- 80-300°C thermostatic oven control
- Manual ignition to oven pilot burner with flame failure


CLEANING AND SERVICING

- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Removable cooktop and oven spill trays
- Stainless steel grease trays on griddles
- Access to all parts from front of unit


Gas Range Static Oven 600mm

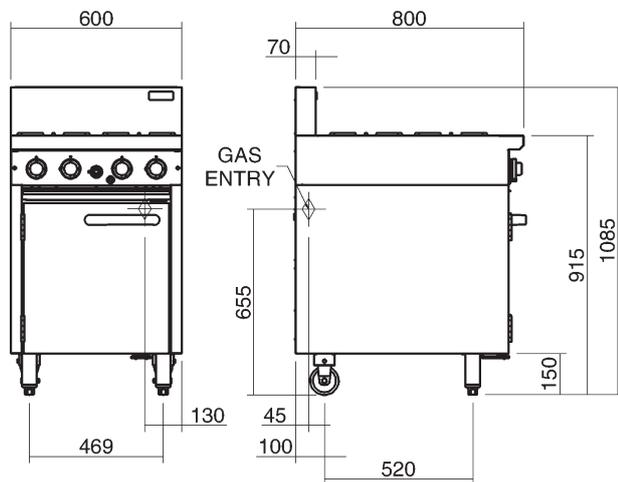

CR6D



CR6C



SPECIFICATIONS

Burners

Open Burners;

Natural Gas
5.5kW, 18,800Btu/hr each

LP gas

5.0kW, 17,000Btu/hr each

Griddle Burners;

5.5kW, 18,800Btu/hr each

Oven Burners;

Natural Gas
7.0kW, 23,800Btu/hr each

LP gas

6.5kW, 22,200Btu/hr each

Gas power (gross)

Natural Gas

CR6D 29kW, 99,000Btu/hr

CR6C 23.5kW, 80,200Btu/hr

LP gas

CR6D 26.5kW, 90,400Btu/hr

CR6C 21.5kW, 73,400Btu/hr

Oven dimensions

Width 460mm

Depth 615mm

Height 365mm

Rack size

450mm x 590mm

Rack positions 4

Gas connection

R 3/4 (BSP) male
130mm from RH side, 20mm from
rear, and 655mm from floor

All units supplied with Natural and
LP gas regulator

Dimensions

Width 600mm

Depth 800mm

Height 915mm

Incl. splashback 1085mm

Nett weight

115kg

Packing data

0.7m3, 167kg

Width 940mm

Depth 865mm

Height 1255mm

Gas types

Available in Natural gas and LP gas,
please specify when ordering



www.blue-seal.co.uk

United Kingdom

blue-seal.co.uk

Blue Seal Limited

Unit 67

Gravelly Business Park

Gravelly

Birmingham B24 8TQ

England

Telephone 0121-327 5575

Facsimile 0121-327 9711

sales@blue-seal.co.uk

Australia

moffat.com.au

Moffat Pty Limited

740 Springvale Road

Mulgrave

Victoria 3170

Australia

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited

45 Illinois Drive

Izone Business Hub

Rolleston 7675

New Zealand

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

International

moffat.com

international@moffat.co.nz



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Cobra products are designed and
manufactured by Moffat using the
internationally recognised ISO9001 quality
management system, covering design,
manufacture and final inspection, ensuring
consistent high quality at all times.

In line with policy to continually develop
and improve its products, Moffat Limited
reserves the right to change
specifications and design without notice.



© Copyright Moffat Ltd
UK.C.SS.1601

an Ali Group Company



The Spirit of Excellence